

Cross-vane trap

Trap for bark beetles, metallic wood-boring beetles & longhorn beetles




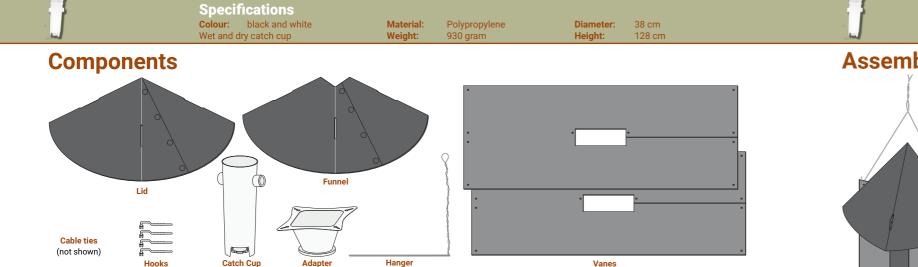

Assembly

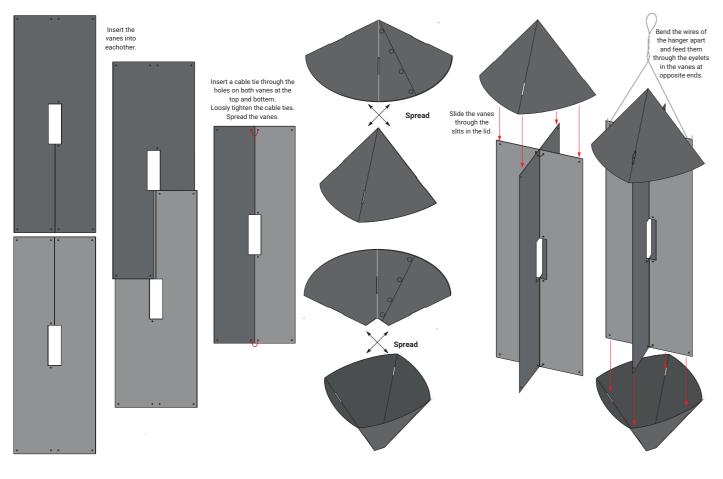

Turn page

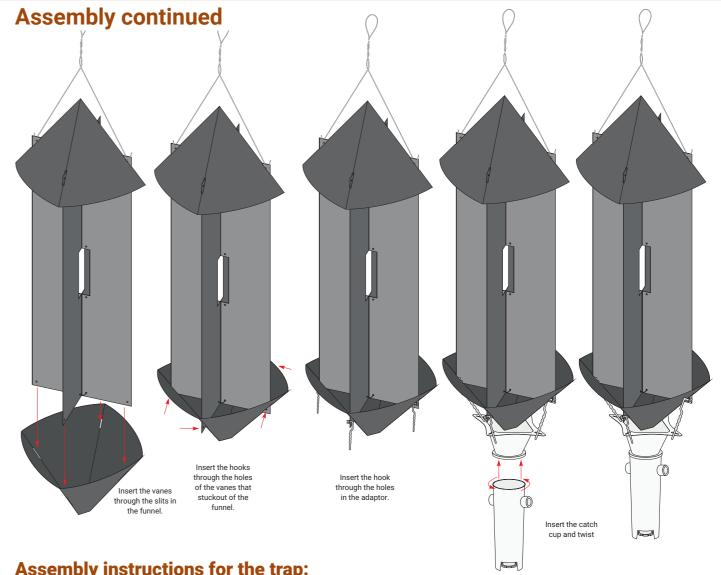

Assembly instructions for the trap:

- Insert the vanes into each other and fasten at the top and bottom using cable ties.
- Place the lid with the four slits on the vanes. •
- Bend the hanger apart at both ends and feed one end through the eyelets of the vanes that stick out of the lid. and bend back.
- Put the funnel on the bottom side of the vanes with the four slits.
- Feed the straight end of the four plastic hooks • respectively through one eyelet on the vanes until



Trap for bark beetles, metallic wood-boring beetles & longhorn beetles

it hangs down vertically.

- Hang the adapter in the groove of the four • plastic suspension lines of the bottom part.
- Then attach the catch cup with the bayonet lock until it locks.
- When the trap is installed, the pheromone is • attached to the pre-punched hole in the cutout on the main body by using a wire or strap.